



Produktdatenblatt Technical Datasheet DI600





Das **DI600** ist ein ZigBee-gesteuertes Dimmerrelais, mit dem verschiedene Lichtquellen gesteuert werden können. Dieses Produkt muss mit dem Universal Gateway UG600/UGE600 und der Salus Smart Home App verwendet werden.

The **DI600** is a Zigbee-controlled dimmer relay, that can be used for controlling different light sources. This product must be used with the Universal Gateway UG600/UGE600 and Salus Smart Home App.

	Technische Eigenschaften
Eingangsspannung	100-240VAC 50Hz
Ausgang	Max. 1.5 A
Max. Last	Dimmbare LED 200W/220V Halogen 400W/220V
Abmessungen	L: 45,5 mm, B: 45 mm, H: 20,3 mm
IP-Klasse	20
Zulassungen	CE
Funk-Frequenz	2.4GHz ZigBee

	Technical Specification
Input Voltage	100-240VAC 50Hz
Output	Max. 1.5 A
Max. Load	Dimmable LED 200W/220V Halogen 400W/220V
Dimensions	L: 45,5 mm, B: 45 mm, H: 20,3 mm
IP-class	20
Approvals	CE
RF frequency	2.4GHz ZigBee

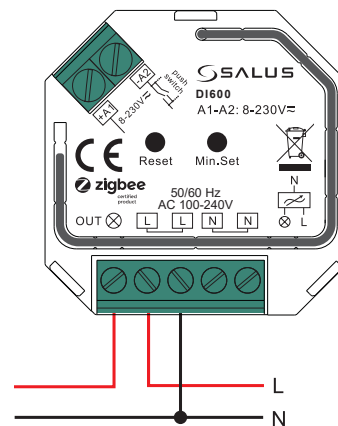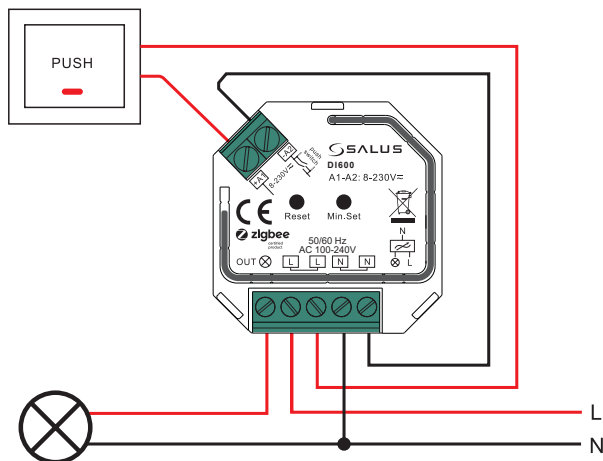

Date/Version

09/21 – 1.0

Technical disclaimer

Alle Rechte vorbehalten. Technische Änderungen vorbehalten. We reserve the right to alter our products without notice.
This also applies to products already on order provided that such changes do not change the functionality of the product

Contact

Salus Controls GmbH
Dieselstraße 34, 63165 Mühlheim am Main
Tel: +49 (0) 6108 825850
info@salus-controls.de